

FIG. 1A

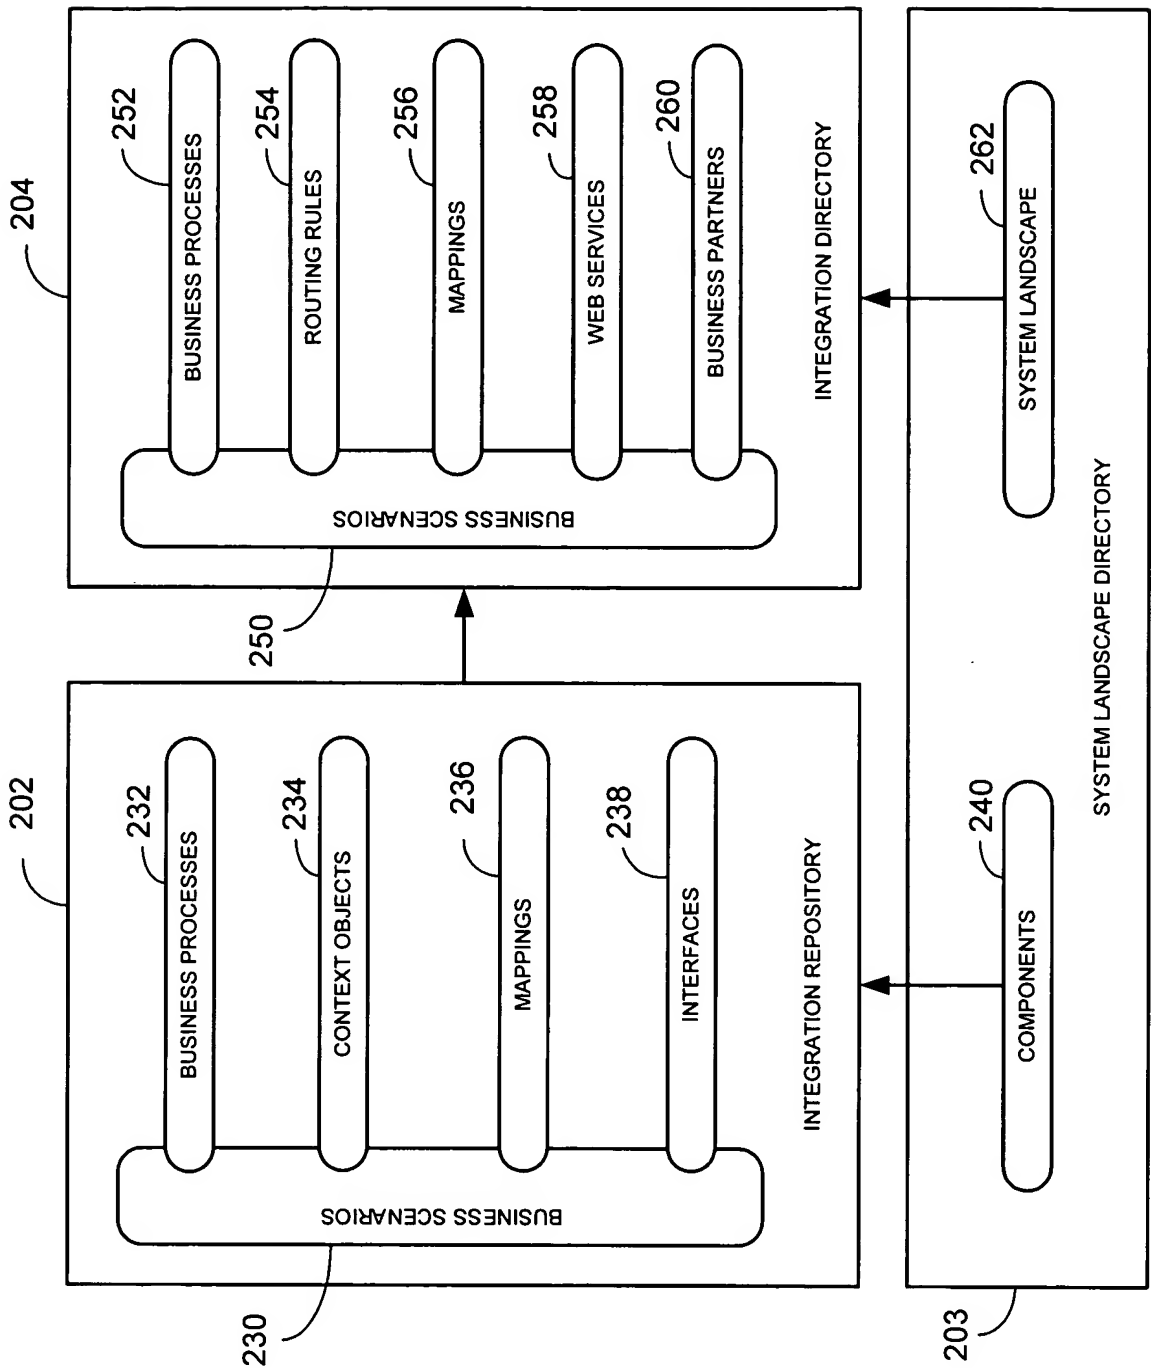


FIG. 1B

```
<ns1:SalesOrder xmlns:ns1=„http://sap.com/xi/CRM“>
  <HeaderData>
    <SalesOrganization>01</SalesOrganization>
    <ShipTo>Meier</ShipTo>
  </HeaderData>
</Item>
  <Material>123</Material>
  <Plant>0001</Plant>
  <Amount>20</Plant>
</Item>
</Item>
  <Material>ABC</Material>
  <Plant>0002</Plant>
  <Amount>10</Plant>
</Item>
</ns1:SalesOrder>
```

272

274

The diagram shows an XML structure for a SalesOrder. The root element is <ns1:SalesOrder>. It contains a <HeaderData> element with <SalesOrganization>01</SalesOrganization> and <ShipTo>Meier</ShipTo>. This is followed by a </HeaderData> element and a </Item> element. Then, there is a <Material>123</Material> element, followed by <Plant>0001</Plant> and <Amount>20</Plant>. This is followed by </Item> and </Item>. Then, there is a <Material>ABC</Material> element, followed by <Plant>0002</Plant> and <Amount>10</Plant>. This is followed by </Item> and </ns1:SalesOrder>. Annotations 272 and 274 point to the <ShipTo>Meier</ShipTo> element and the <Amount>20</Plant> element, respectively.

FIG. 2

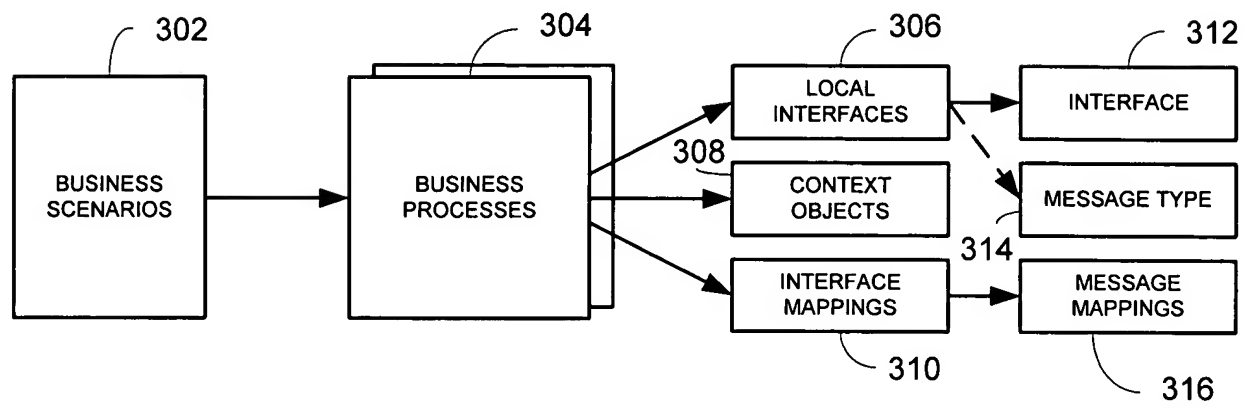
300

FIG. 3